

PURE 16/9 (PU16-9-V3)



A

PURE Manual (with ventilation) - Ecological combustion - Sealed device

PU16-9V3-AC-AV-VE / PU16-9V3-AC-AV-DM / PU16-9V3-AC-AV-BN Steel door

PU16-9V3-NL-AV-VE / PU16-9V3-NL-AV-DM / PU16-9V3-NL-AV-BN New look door

kW	Rendement %	CO (mg/Nm³)	COG (mg/Nm³)	Poussière (mg/Nm³)	NOX (mg/Nm³)	eI_max (kW)	eI_min (kW)	eI_sb (kW)
12	77	900	59	22	57	0,052	0,037	0,001

Options

Dimensions ext. (mm) : 1000 x 510 x 470

Flat frame PURE 16-9 - 3 sided - 40mm

Flat frame PURE 16-9 - 4 sided - 40mm

Frame PURE 16-9 - drawn steel - 4 sided - 10 mm - depth 20mm

Frame PURE 16-9 - drawn steel - 4 sided - 10 mm - depth 55mm

Hot air tubes kit 125 Ø + Air stop kit

Reserve door fitting





Interior : vermiculite (VE) or black concrete (BN) or metal decoration (DM)

Smoke outlet : 45° or right

Shut-off nozzles for hot air distribution

Caractéristiques

Manual combustion air regulation - external air intake Ø 100 mm - baffle vermiculite + 2e chicane inox - stop embers - 2 warm air tubes Ø 125 mm - smoke outlet Ø 150 mm - color anthracite - WITHOUT FINISHING FRAME (following your choice) - Concrete floor - 4 adjustable feet - 2-position door closing system - Double baffles, one vermiculite baffle adjustable to 3 positions and one fixe
Real view of fire (mm) - 852 x 324

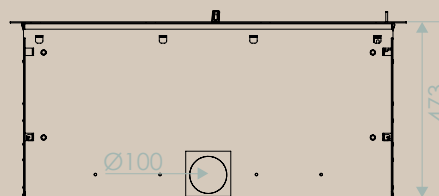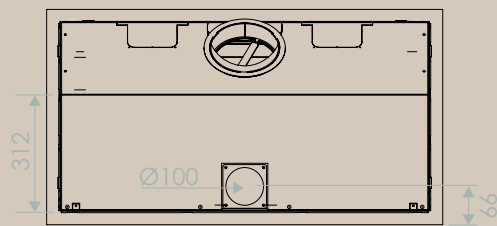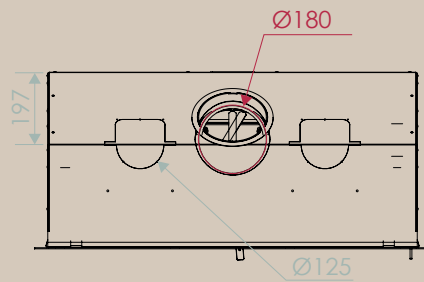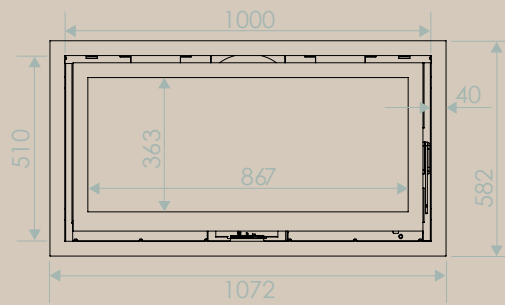

NOTES: