

PURE XL 16/9 (PUXL16-9-V2)



A

PURE Manual (with ventilation) - Ecological combustion - Sealed device

PUXL16-9V3-AC-AV-VE / PUXL16-9V3-AC-AV-DM / PUXL16-9V3-AC-AV-BN

Steel door

PUXL16-9V3-NL-AV-VE / PUXL16-9V3-NL-AV-DM / PUXL16-9V3-NL-AV-BN

New look door

kW	Rendement %	CO (mg/Nm³)	COG (mg/Nm³)	Poussière (mg/Nm³)	NOX (mg/Nm³)	el_max (kw)	el_min (kw)	el_sb (kw)
13	81	1213	71	15	115	0,052	0,037	0,001

Options

Dimensions ext. (mm) : 1000 x 600 x 475

Flat frame PURE XL 16-9 - 3 sided - 40mm

Flat frame PURE XL 16-9 - 4 sided - 40mm

Frame PURE XL 16-9 - drawn steel - 4 sided - 10 mm - depth 20mm

Frame PURE XL 16-9 - drawn steel - 4 sided - 10 mm - depth 55mm

Hot air tubes kit 125 Ø + Air stop kit

Reserve door fitting





Interior : vermiculite (VE) or black concrete (BN) or metal decoration (DM)

Smoke outlet : 45° or right

Shut-off nozzles for hot air distribution

Caractéristiques

Manual combustion air regulation - external air intake Ø 100 mm - baffle vermiculite + 2e chicane inox - stop embers - 2 warm air tubes Ø 125 mm - smoke outlet Ø 150 mm - color anthracite - WITHOUT FINISHING FRAME (following your choice) - Concrete floor - 4 adjustable feet - 2-position door closing system - Double baffles, one vermiculite baffle adjustable to 3 positions and one fixe
Real view of fire (mm) - 846 x 404

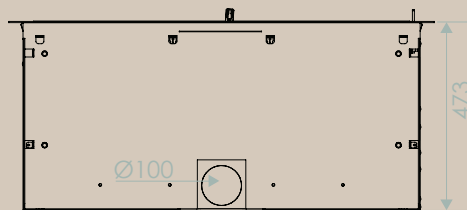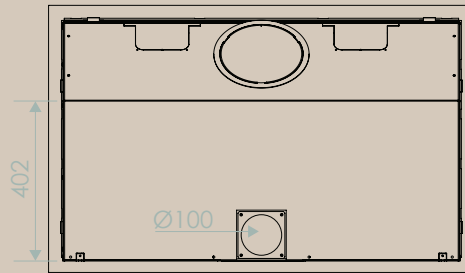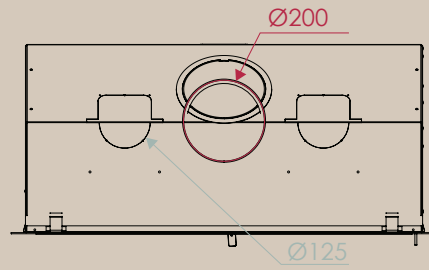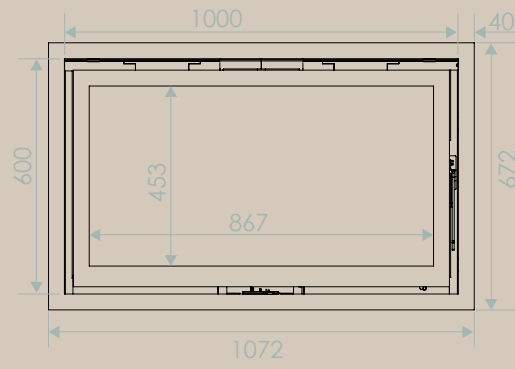

NOTES: