LOFT 56-75








Loft - Ecological combustion - Sealed device

| | Réf | | Ventil. | kW | |
|--|-------|-------|---------|----|-----------|
| Loft 56/75 - new look door - vermiculite - 56x75x50 | LF5 | 56/75 | without | 9 | A+ |
| Real view of fire - L 459 mm - H 645 mm | | | | | |
| Option | | | | | |
| Kit ventilation with speed controller and airstat | | | | | |
| Kit ventilation with speed controller and airstat | | | | | |
| Speed controller with remote control | | | | | |
| Speed controller with thermostat | | | | | |
| Interior vermiculite painted black | | | | | |
| 2 small tubes of hot air Ø 150 mm | | | | | |
| Stop air (only in combination with hot air tubes) | | | | | |
| Finishing frame in 1 piece | | | | | |
| 4-sided frame- 40 mm flat 3 mm | | | | | |
| Included | | | | | |
| Next to all shows the second second second second states and states and states | 0.100 | | | | c · · · · |

New look door - manual combustion air regulation - external air intake Ø 100 mm - double baffle (vermiculite + inox one of wich is adjustable in depth) - without ventilation - interior vermiculite - 4 adjustable feet - stainless steel Ø 180 mm nozzle for smoke outlet colour antracite - WITH FINISHING FRAME ÉTIRÉ 4 MM WELDED ON THE DEVICE



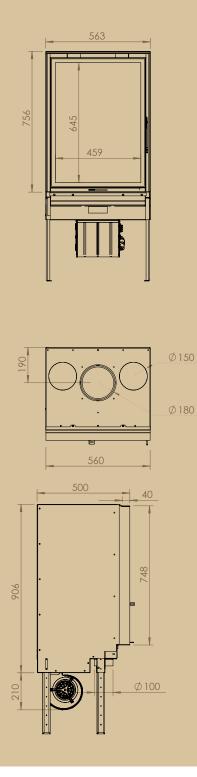

NOTES :

