


LOFT 77-51

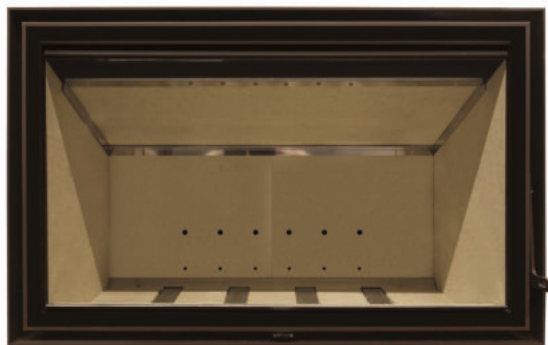

Loft (without ventilation) - Sealed device

New look door (LF77)

Kw	Efficiency %	CO (mg/Nm ³)	COG (mg/Nm ³)	Dust (mg/Nm ³)	NOX (mg/Nm ³)	el_max (kw)	el_min (kw)	el_sb (kw)
9	82	838	35	8	102	0,000	0,000	0,000

Options

Flat frame Loft 77 - 4 sided - 40mm

Black painted vermic. interior

Ventilation kit for Loft

Flat hot air tubes kit Ø150 + air stop kit

Speed controller

Speed controller with thermostat ambient temperature




Included

Manual combustion air regulation - external air intake Ø 100 mm - double baffle (vermiculite + inox one of wich is adjustable in depth) - interior vermiculite - 4 adjustable feet - stainless steel Ø 180 mm nozzle for smoke outlet - colour antracite - with finishing flat frame 4 mm welded on the device

Dimentions (mm) - 770 x 510 x 500

Real view of fire (mm) - 669 x 395



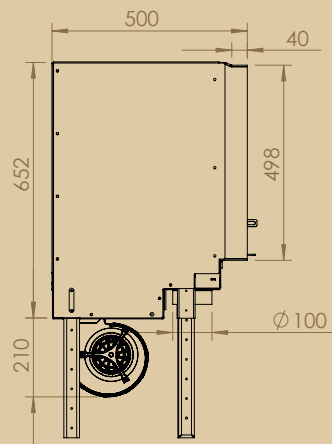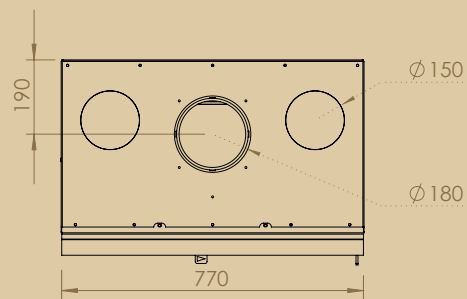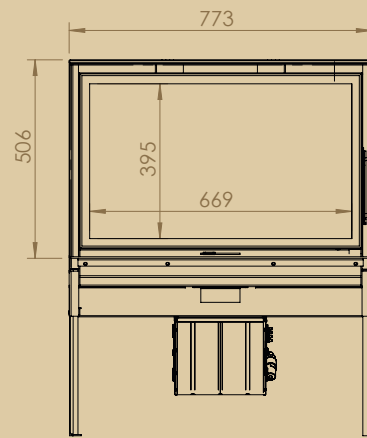

NOTES :
