


# PURE 16/9 FULL AUTOMATIC

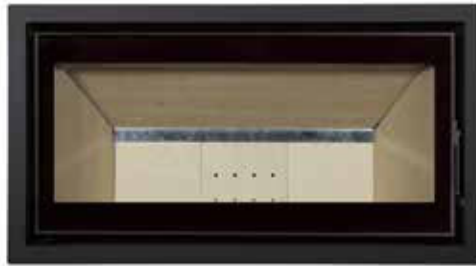

## Pure Automatic - Forced convection - Ecological combustion - Sealed device

Steel door or New look - With ventilation	Réf.	Ventil.	kW	
Pure 16/9 full auto - Steel door - verm. - 100x51x47	PU16/9A.A.AV	with	11 - 13	A+
Pure 16/9 full auto - New look door - verm. - 100x51x47	PU16/9A.NLAV	with	11 - 13	A+

Real view of fire - L 852 mm - H 324 mm

### Option

Speed controller with remote control

Speed controller with thermostat (RT012)

Interior vermiculite painted black

2 small folded tubes of hot air Ø 125 mm

Stop air (only in combination with hot air tubes(s))

Reverse door fitting

### Finishing frame in 1 piece

### External dimensions

3-sided frame - 40 mm flat 3 mm

1072 x 547,5

4-sided frame - 40 mm flat 3 mm

1072 x 581

4-sided frame étiré 10 mm depth 20 mm

1010 x 520

4-sided frame étiré 10 mm depth 55 mm

1010 x 520

### Included

Steel/New look door - automatic thermostat - external air intake Ø 100 mm - baffle vermiculite - stop embers - 2 centrifugal fans 140m³/h - interior vermiculite - speed controller, airstat - filter(s) - 45° angled stainless steel nozzle for smoke outlet Ø 180 mm - colour antracite - WITHOUT FINISHING FRAME: optional





# PURE 16/9 MANUAL



## Pure Manual - Ecological combustion - Sealed device

Steel door or New look - With ventilation	Réf.	Ventil.	kW	
Pure 16/9 manual - Steel door - verm. - 100x51x47	PU16/9M.A.AV	with	11 - 13	A+
Pure 16/9 manual - New look door - verm. - 100x51x47	PU16/9M.NL.AV	with	11 - 13	A+

Real view of fire - L 852 mm - H 324 mm

## Option

Speed controller with remote control

Speed controller with thermostat (RT012)

Interior vermiculite painted black

2 small folded tubes of hot air Ø 125 mm

Stop air (only in combination with hot air tube(s))

Reserve door fitting

Finishing frame in 1 piece	External dimensions
3-sided frame - 40 mm flat 3 mm	1072 x 547,5
4-sided frame - 40 mm flat 3 mm	1072 x 581
4-sided frame étiré 10 mm depth 20 mm	1010 x 520
4-sided frame étiré 10 mm depth 55 mm	1010 x 520


## Included

Steel/New look door - manual combustion air regulation - external air intake Ø 100 mm - baffle vermiculite - stop embers - 2 centrifugal fans 140m<sup>3</sup>/h - interior vermiculite - 45° angled stainless steel nozzle for smoke outlet Ø 180 mm - colour antracite filter(s) - WITHOUT FINISHING FRAME: optional





# PURE 16/9 MANUAL

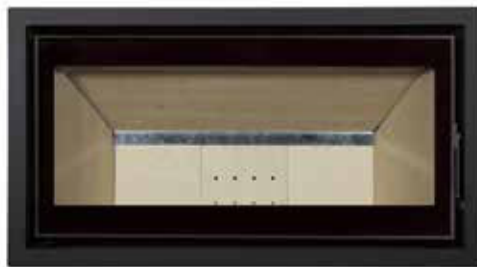

## Pure Manual - Ecological combustion - Sealed device

Steel door or New look - Without ventilation	Réf.	Ventil.	kW	
Pure 16/9 manual - Steel door - verm. - 100x51x47	PU16/9M.A.SV	without	11 - 13	A+
Pure 16/9 manual - New look door - verm. - 100x51x47	PU16/9M.NL.SV	without	11 - 13	A+

Real view of fire - L 852 mm - H 324 mm

## Option

Interior vermiculite painted black

Reverse door fitting

Finishing frame in 1 piece	External dimensions
3-sided frame - 40 mm flat 3 mm	1072 x 547,5
4-sided frame - 40 mm flat 3 mm	1072 x 581
4-sided frame étiré 10 mm depth 20 mm	1010 x 520
4-sided frame étiré 10 mm depth 55 mm	1010 x 520

## Included

Steel/New look door - manual combustion air regulation - external air intake Ø 100 mm - baffle vermiculite - stop embers 45° angled stainless steel nozzle for smoke outlet Ø 180 mm - colour antracite - 2 warm air tubes Ø 125 mm - WITHOUT FINISHING FRAME: optional



